


## Connector AM-TOP® - Part no. 5



- screw terminals
- single part body
- cable gland and sealing
- strain relief and protection against kinking

Protection type IP 44  
 Ampere 16 A  
 Poles 5p  
 Voltage 400  
 Hertz 50-60Hz  
 Earth position 6h  
 Contact standard  
 Connection technology Screw terminals

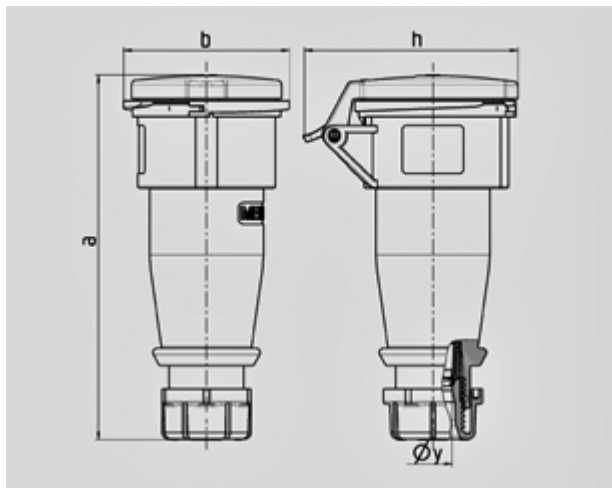

| Drawing                  | Amp.  | 16   |      |      | 32  |     |     |
|--------------------------|-------|------|------|------|-----|-----|-----|
|                          |       | 3    | 4    | 5    | 3   | 4   | 5   |
| 3 MB 63                  | Poles |      |      |      |     |     |     |
| Dim. in mm               | a     | 162  | 165  | 167  | 209 | 209 | 208 |
|                          | b     | 60   | 68   | 76   | 82  | 82  | 89  |
|                          | h     | 83   | 92   | 98   | 100 | 100 | 108 |
|                          | y     | 14,5 | 16   | 16   | 22  | 22  | 22  |
| Terminal for cond. cross |       | 1    | 1    | 1    | 2,5 | 2,5 | 2,5 |
| section (mm²) min.-max.  |       | —2,5 | —2,5 | —2,5 | —6  | —6  | —6  |