




DESCRIPTION:

Easy Entry Pre-Insulated Crimp Terminals are made from oxygen-free high conductivity copper. They are electro-tin plated for excellent conductivity and resistance to corrosion. Push-On terminals are made from brass, while the insulated types benefit from an additional internal copper sleeve, ensuring insulation support and a good crimp joint.

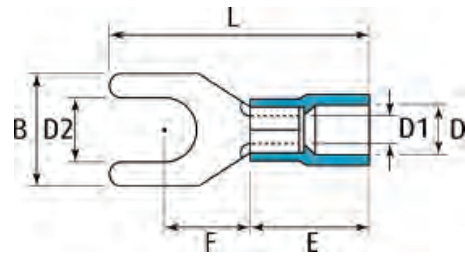

SPECIFICATION:

PVC:

MATERIAL: Electro-tin plated copper
INSULATION: Polyvinyl Chloride
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 75°C
MAX VOLTAGE: 600V



NYLON:

MATERIAL: Electro-tin plated copper
INSULATION: Nylon
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 105°C
MAX VOLTAGE: 600V



PART NUMBERS:

COLOUR/ WIRE Ø mm ²	PART NO.		Max. elect. rating (A)	STUD SIZE D2	DIMENSIONS (mm)						PACK QTY
	PVC	NYLON			B	L	F	E	D	D1	
0.5 - 1.5 RED	CIF1-3	CNIF1-3	19	3.2	5.8	21.0	6.3	10.0	4.1	1.7	100
	CIF1-3.5	CNIF1-3.5	19	3.7	5.8	21.0	6.3	10.0	4.1	1.7	100
	CIF1-4	CNIF1-4	19	4.3	6.4	20.6	6.3	10.0	4.1	1.7	100
	CIF1-5	CNIF1-5	19	5.3	8.0	21.0	7.0	10.0	4.1	1.7	100
	CIF1-6	CNIF1-6	19	6.5	9.5	21.0	7.0	10.0	4.1	1.7	100
1.5 - 2.5 BLUE	CIF2-3	CNIF2-3	27	3.2	5.8	21.0	6.3	10.0	4.5	2.3	100
	CIF2-3.5	CNIF2-3.5	27	3.7	5.8	21.0	6.3	10.0	4.5	2.3	100
	CIF2-4	CNIF2-4	27	4.3	6.4	21.0	6.3	10.0	4.5	2.3	100
	CIF2-5	CNIF2-5	27	5.3	8.5	22.0	7.3	10.0	4.5	2.3	100
	CIF2-6	CNIF2-6	27	6.5	9.5	22.0	7.3	10.0	4.5	2.3	100
	CIF2-8	CNIF2-8	27	8.4	12.0	27.2	11.0	10.0	4.5	2.3	100
4-6 YELLOW	CIF3-3.5	CNIF3-3.5	48	3.7	7.2	25.2	7.5	12.5	6.5	3.4	50
	CIF3-4	CNIF3-4	48	4.3	8.5	25.2	7.5	12.5	6.5	3.4	50
	CIF3-5	CNIF3-5	48	5.3	9.5	25.2	7.5	12.5	6.5	3.4	50
	CIF3-6	CNIF3-6	48	6.5	9.5	25.2	7.5	12.5	6.5	3.4	50
	CIF3-8	CNIF3-8	48	8.4	13.5	30.0	10.5	12.5	6.5	3.4	50



Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297