




DESCRIPTION:

Our range of insulated tabs and receptacles are suitable for wires from 0.25mm² to 6.0mm². All types have a copper reinforcement sleeve and are made from copper-alloy, electro tinned. They feature high mechanical and dielectric resistant insulation, with heat resistant up to +75°C.

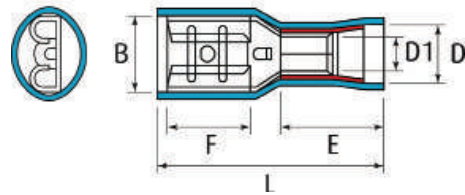

SPECIFICATION:

PVC:

MATERIAL: Electro-tin plated copper
INSULATION: Polyvinyl Chloride
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 75°C
MAX VOLTAGE: 300V



NYLON:

MATERIAL: Electro-tin plated copper
INSULATION: Nylon
APPROVALS: UL, E211389, RoHS compliant
MAX TEMPERATURE: 105°C
MAX VOLTAGE: 300V



PART NUMBERS:

COLOUR/WIRE Ø mm ²	PART NO.		Max. elect. rating (A)	FOR TAB		DIMENSIONS (mm)						PACK QTY.
	PVC	NYLON		WIDTH (mm)	DEPTH (mm)	B	F	L	E	D	D1	
0.5 - 1.5 RED	CIFPO1-2.8F	CNIFPO1-2.8F	10	2.8	0.5	3.2	6.4	19.0	10.0	4.3	1.7	100
	CIFPO1-2.8FX	CNIFPO1-2.8FX	10	2.8	0.8	3.2	6.4	19.0	10.0	4.3	1.7	100
	CIFPO1-4.8F	CNIFPO1-4.8F	10	4.8	0.5	5.0	6.5	20.0	10.0	4.3	1.7	100
	CIFPO1-4.8FX	CNIFPO1-4.8FX	10	4.8	0.8	5.0	6.5	20.0	10.0	4.3	1.7	100
	CIFPO1-6.3F	CNIFPO1-6.3F	10	6.4	0.8	6.6	7.9	22.0	10.0	4.3	1.7	50
1.5 - 2.5 BLUE	CIFPO2-2.8F	CNIFPO2-2.8F	15	2.8	0.5	3.2	6.4	19.0	10.0	5.0	2.3	100
	CIFPO2-2.8FX	CNIFPO2-2.8FX	15	2.8	0.8	3.2	6.4	19.0	10.0	5.0	2.3	100
	CIFPO2-4.8F	CNIFPO2-4.8F	15	4.8	0.5	5.0	6.5	20.0	10.0	5.0	2.3	100
	CIFPO2-4.8FX	CNIFPO2-4.8FX	15	4.8	0.8	5.0	6.5	20.0	10.0	5.0	2.3	100
	CIFPO2-6.3F	CNIFPO2-6.3F	15	6.4	0.8	6.6	7.9	22.0	10.0	5.0	2.3	50
4-6 YELLOW	CIFPO3-6.3F	CNIFPO3-6.3F	24	6.4	0.8	6.6	7.9	25.0	13.0	6.5	3.4	50
	CIFPO3-9.5F	CNIFPO3-9.5F	24	9.5	1.2	9.9	12.5	29.5	13.0	6.5	3.4	25



CABLECRAFT™
creative wiring solutions



INVESTORS
IN PEOPLE



CABLECRAFT COMPANY

Cablecraft House, Circle Business Centre, Blackburn Road, Houghton-Regis, Bedfordshire, LU5 5DD.
Phone: 01582 606033 • **Fax:** 01582 606063 • **Email:** sales@cablecraft.co.uk • **Web:** www.cablecraft.co.uk

VAT NO. GB 639 920 900 • CO. REG. NO. 2478297