



# PROTECTA X

LED Linear

The next generation in LED linear luminaires, the Protecta X's revolutionary design puts LED at the centre to provide the performance of a 4ft linear in a lightweight and slimline package. Offering a robust enclosure, excellent IP and a variety of features to make installation and maintenance effortless, the Protecta X is ideal for industrial environments. Expected useful life to 70% of the initial lumens (L70) is >200,000 hours at 25°C, with an incredible 90,000 maintenance free hours at 60°C. For a luminaire with the longest life, the highest output and market-leading efficacy, choose the **Protecta X**.



CE

International Approvals

## Mounting Options

Ceiling. Wall. Suspended. Pole. Handrail.

## Standard Specification

Protecta X LED Linear

Enclosure	Marine grade aluminium body with polycarbonate diffuser. Driver enclosure with epoxy powder finish (RAL 9005)
Geartray	Aluminium
Entry	4 x M20 cable entries - 2 at each end [3 cable entries on Emergency with battery stick]
Termination	3 core 4mm <sup>2</sup> max conductor [4 core on Emergency] with looping one end and 16A rating through wiring
Installation	2 x M8 mounting points located on the rear of the body
Control Gear	Electronic Driver
Colour Temperature (CCT)	5000K (Cool White)
Colour Rendering Index (Ra)	>70
Maintenance	Front access panel with Torx screws
LED Lifetime @ 60°C Ambient	L70 > 200,000hrs
Maintenance Free Lifetime @ Ambient	120,000hrs @ 25°C; 90,000hrs @ 60°C
Battery	Swappable Ni-MH (6V) battery stick [Emergency version only]
Emergency Duration	90 mins (25% output)
Ingress Protection	IP66/67 to EN 60529
Surge Protection	4kV
Electrical Supply	110-277V AC, 50/60Hz 127-250V DC

## Features

- ◆ Highly **Energy Efficient** >135lm/W
- ◆ **Screwless** mains terminals
- ◆ **Multiple beam** distributions available
- ◆ **Front access cover** for easy termination
- ◆ **>90,000 maintenance free hours** at 60°C
- ◆ **Externally accessible battery stick** for ease of maintenance


Std. Cat No.	Delivered Output	Power Consumption	Ambient °C	Weight
<b>PRXI/02L/LE</b>	2600 lm	16W	-40 to +60	6.8kg
<b>PRXI/05L/LE</b>	5200 lm	36W	-40 to +60	8.8kg
<b>PRXI/02L/LE/EM</b>	2600 lm	18.5W	-25 to +60	7.3kg
<b>PRXI/05L/LE/EM</b>	5200 lm	38.5W	-25 to +60	9.3kg

## Options - Suffix to Catalogue No.

<b>/M25</b>	M25 cable entries	<b>/3H</b>	3 hour battery duration (12.5% output)
<b>/LBE</b>	Looping both sides [Non Emergency only]	<b>/4K</b>	4000K (Neutral White) LED Strips
<b>/EL</b>	Extra live termination facility (to match emergency circuit)	<b>/SC</b>	Screwed connection terminal block (up to 6mm <sup>2</sup> conductors)
<b>/EMI</b>	Internal battery pack [replace /EM with /EMI]	<b>/BNI</b>	Batteries not included [Emergency version only]
<b>/NST</b>	Non Self Test [Emergency version only]	<b>/DM</b>	DALI Dimmable driver
<b>/ASL</b>	Asymmetric along Length	<b>/M</b>	Medium Beam
<b>/ASW</b>	Asymmetric along Width [05L version only]		


Accessories *order separately*

	Order Code
Pole mounting bracket assembly (38-42mm diameter poles)	<b>SPOL4-100001</b>
Pole mounting bracket assembly (48-52mm diameter poles)	<b>SPOL4-100002</b>
Pole mounting bracket assembly (58-62mm diameter poles)	<b>SPOL4-100003</b>
Hook type ceiling bracket assembly	<b>SPRO4-0005</b>
Flush mounted wall bracket assembly	<b>SPRO4-0006</b>
Ceiling bracket assembly	<b>SPRO4-0002</b>
Standard wall mounting outreach bracket (use with SPOL4-100001)	<b>NPRO4-0008</b>
Eyebolt mounting assembly	<b>SPRO5-0005</b>

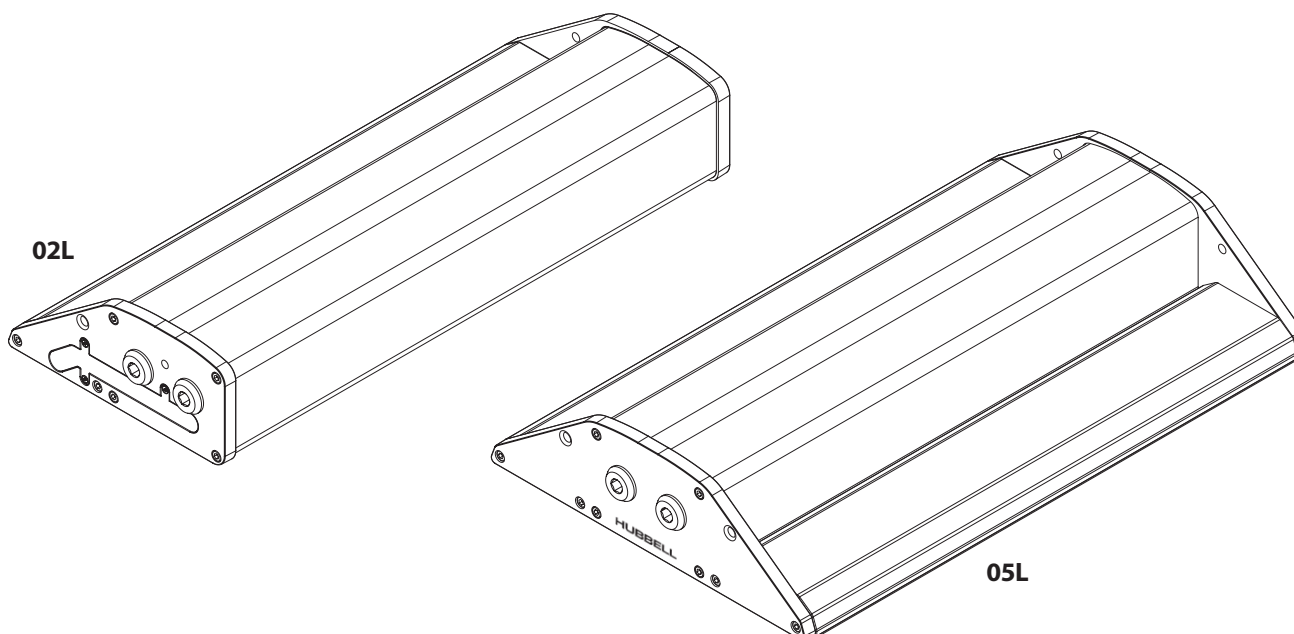

# Dimensioned Drawings

## PROTECTA X - 05L

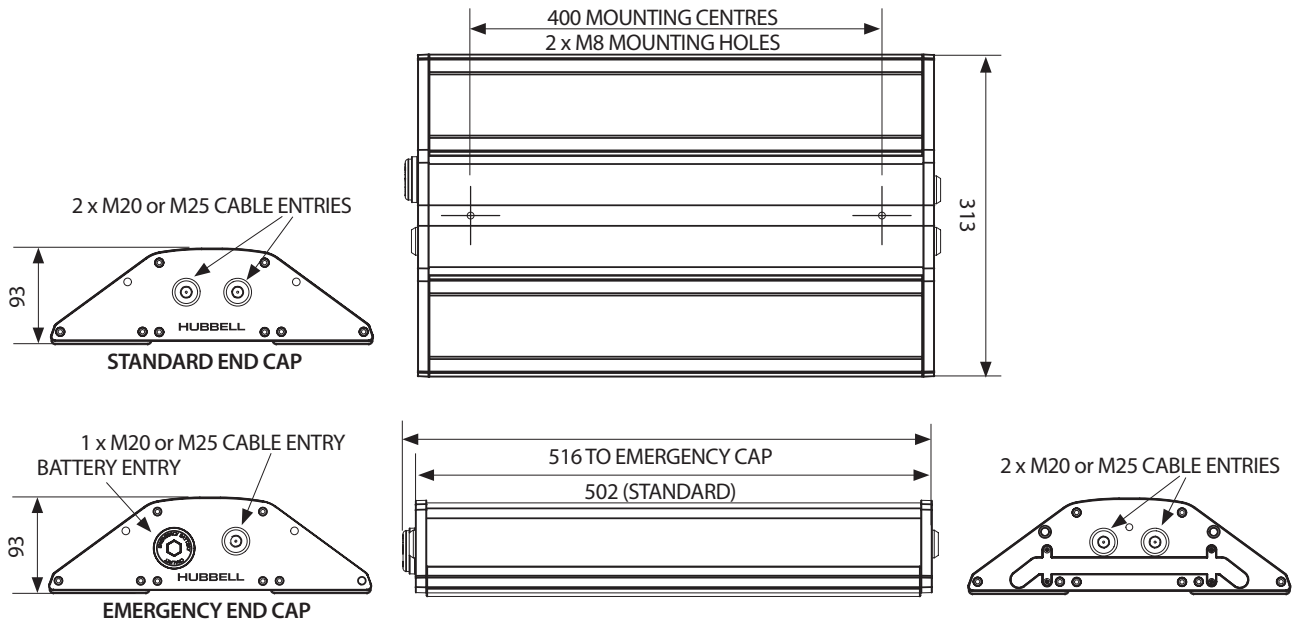

## PROTECTA X - 02L

