


CABLE TRAY SYSTEM

Heavy Duty 60° Variable Riser

Fitting Type: HR-VR60

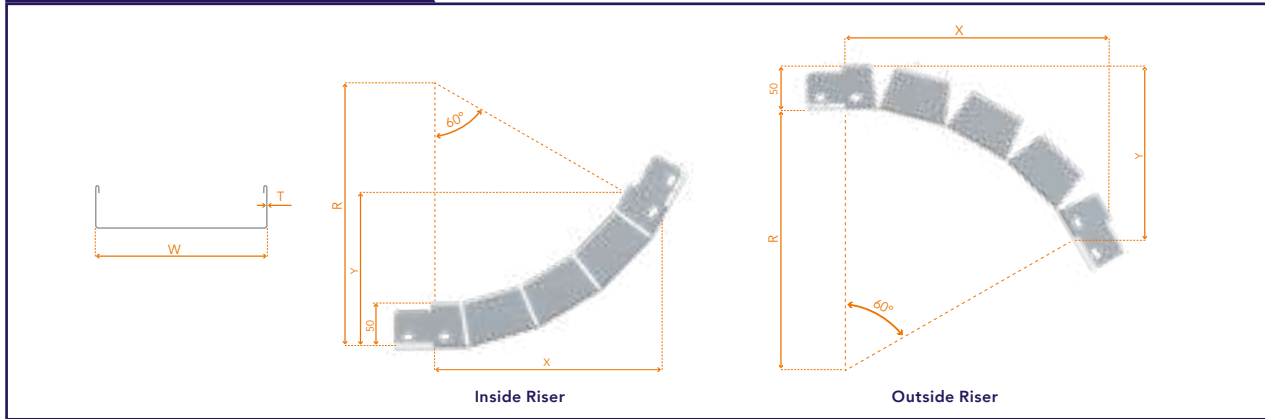

Part Number	Width W mm	T mm	R mm	Inside Riser		Outside Riser		Weight (kg)
				X	Y	X	Y	
HR-VR60-50-300R-○	50	0.9	300	261	175	301	198	0.40
HR-VR60-75-300R-○	75							0.46
HR-VR60-100-300R-○	100							0.53
HR-VR60-150-300R-○	150	1.2	300	261	175	301	198	0.66
HR-VR60-200-300R-○	200							1.05
HR-VR60-225-300R-○	225							1.14
HR-VR60-300-300R-○	300							1.41

Gauge & weights are given for the hot dip galvanised mild steel cable tray, with a nominal standard sidewall height of 50mm. Refer to the Engineering Data Section (Page 227) for other materials and gauges.

Finishes & Materials:



Supplied with:

SEE ENGINEERING DATA FOR NUMBER OF FIXINGS


Not Required:



○ = Select a Finish & Material

Heavy Duty 90° Variable Riser

Fitting Type: HR-VR90

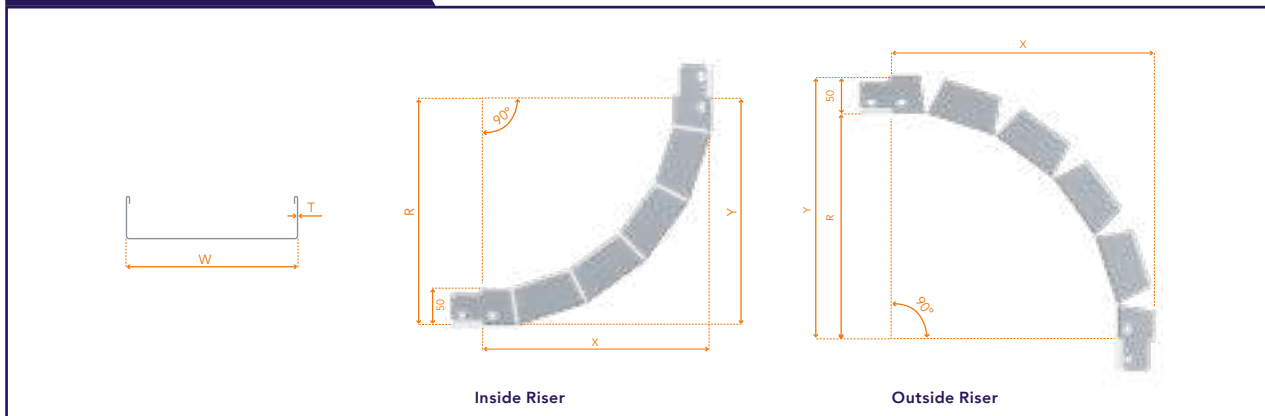

Part Number	Width W mm	T mm	R mm	Inside Riser		Outside Riser		Weight (kg)
				X	Y	X	Y	
HR-VR90-50-300R-○	50	0.9	300	300	300	350	350	0.57
HR-VR90-75-300R-○	75							0.67
HR-VR90-100-300R-○	100							0.76
HR-VR90-150-300R-○	150	1.2	300	300	300	350	350	0.95
HR-VR90-200-300R-○	200							1.51
HR-VR90-225-300R-○	225							1.64
HR-VR90-300-300R-○	300							2.02

Gauge & weights are given for the hot dip galvanised mild steel cable tray, with a nominal standard sidewall height of 50mm. Refer to the Engineering Data Section (Page 227) for other materials and gauges.

Finishes & Materials:



Supplied with:

SEE ENGINEERING DATA FOR NUMBER OF FIXINGS

Not Required:



○ = Select a Finish & Material